

# Compressed Air Filtration

## Oil and Particulate Air Treatment



- Low Pressure Drop
- Reduces Energy Requirements
- Comes With A Performance Guarantee

# Sullair Capabilities

## Sullair Leadership

Since 1965, Sullair has been recognized around the world as an innovator and a leader in rotary screw compression and vacuum technology. For more than 40 years, Sullair has designed and manufactured its own rotors and air end assemblies at the corporate headquarters in Michigan City, Indiana.

The award-winning rotary screw design sets the industry standards and delivers the quality and reliability one expects from a leader.

## Sullair Technology


Utilizing the most modern technologies, equipment and advanced manufacturing techniques, Sullair designs, manufactures, assembles, and tests the most innovative compressed air and vacuum products in the industry. Sullair products are known around the world for their universally applicable design, outstanding craftsmanship and superior quality.

## Sullair's Statistical Process Control

Sullair's Statistical Process Control (SPC) system monitors rotor quality standards to assure consistent compressor and vacuum performance.

## Sullair's Commitment to Innovation

Underlying Sullair's leadership is a dedication to excellence and a commitment to innovation. Sullair is constantly exploring new ideas and seeking new ways to meet industry's need for increasingly energy-efficient compressed air and vacuum solutions.

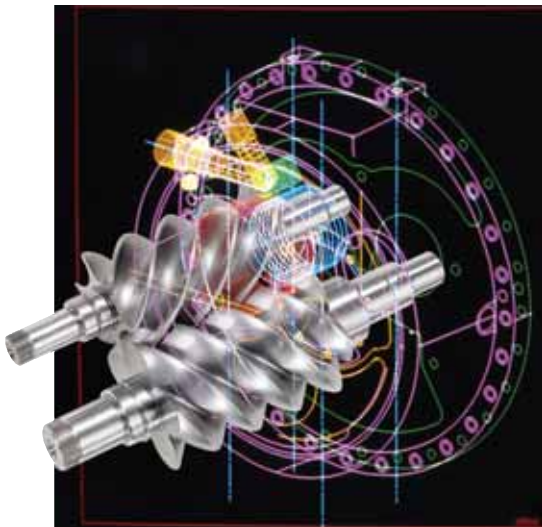

# Sullair Compressed Air Filters

Sullair filters protect your plant equipment and processes, improve your product quality and reduce your energy costs. Sullair offers filters for general purpose compressed air and for high quality compressed air for instrumentation, food processing and pharmaceutical production. Sullair filters are available from 13 to 16,500 scfm, 15 to 725 psig, 35°F to 250°F, ISO 8573.1 quality classes.

- Compressed air is filtered to remove atmospheric particulate, aerosols and other pollutants to provide compressed air for general purposes to the most critical application.
- Filtration equipment includes pre-filters, high efficiency filters and odor-removal filters.
- The type, number, and placement of filters depend on the applications and the degree of contaminant removal required.

## Five-Year Filter Guarantee

Sullair backs this new technology with a five-year warranty on the housing and a five-year warranty on performance, provided the element is changed annually.



## Particulate Filters: SCF, SCR, PF and PR

High-efficiency pre-filters (after-filters) remove particles to 1 micron, including coalesced liquid water and lubricants. Maximum remaining aerosol content after filtration is 0.5 ppm @ 70°F.

## High Efficiency Filtration: SCH, SCHR and PH

For maximum filtration, Sullair offers compressed air filters to remove particulate down to 0.01 micron, including water and oil aerosols, providing a maximum remaining oil aerosol content of 0.01 ppm @ 70°F, when used with SCF and PF pre-filters.

## Odor Removal: SCC, PC

Sullair filters use activated carbon to remove lubricant and hydrocarbon odors. After filtration, remaining vapor content is less than 0.003 ppm (excluding methane). This filter installation should always be preceded by high efficiency filter grades.

## Combination Filters: MPH

This package combines high efficiency and odor-removal type filters in one housing.

# New Sullair Filtration Technology



## New Sullair Filtration Technology

Sullair compressed air filters use very little energy as they have a low resistance to air flow. Advancements such as deep bed pleating, graded density media and an oleophobic coating have led to a high performance filter element with low initial energy costs. Differential pressure starts low and stays low throughout its life. Service life is no longer dependent on differential pressure, but is based on annual filter element change, backed up with a one-year air quality guarantee.





## Old Filtration Technology

Ordinary compressed air filters have always consumed too much energy, as they are by design, a restriction to air flow. During their working life, this restriction increases dramatically, and over time, can consume more energy than they are worth. As service life is dependent upon differential pressure, most manufacturers recommend a replacement filter element between 7 psi (500 mbar) and 10 psi (700 mbar) differential. This adds up to a massive 3.5% extra in compressor energy costs.

## Filter Life Comparison

Data shown is for the SCH filter.

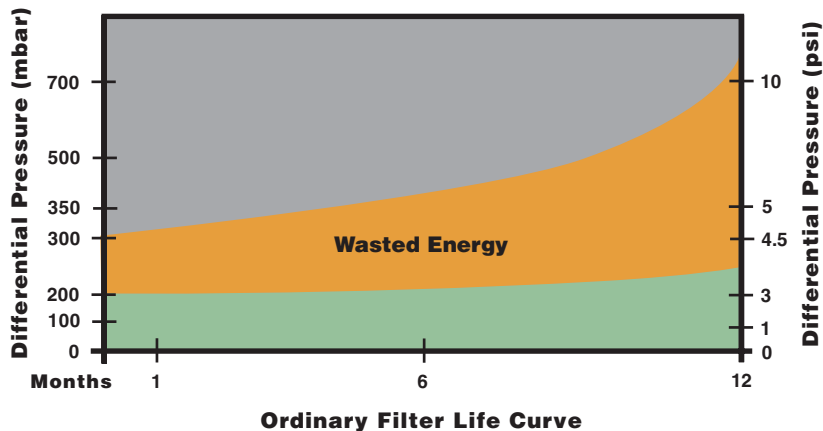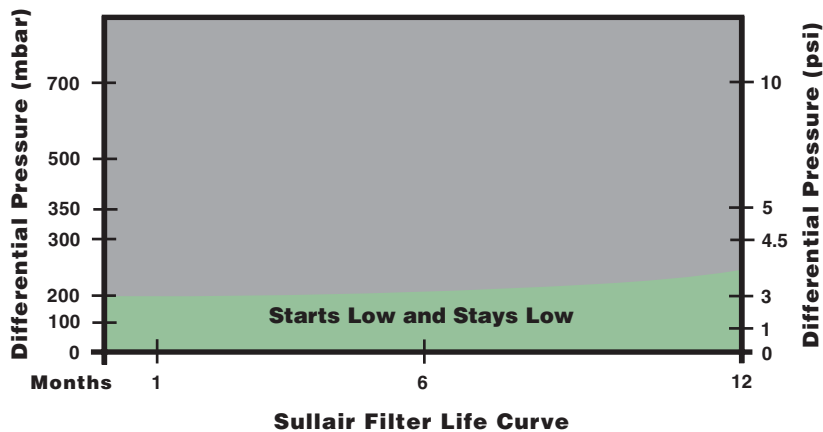

# Sullair Advanced Filter Housings



## Compact and Lightweight

Advanced housing and element design have also provided a smaller, more compact and lightweight filter which is quick, easy and clean to maintain.



## Filter Connections

More port sizes are available to match both pipe size and system flow rate giving additional customer choice.



## Fully Corrosion Protected


Alocrom and dry powder epoxy coated for full corrosion protection.

**Left:** No corrosion with Alocrom treatment  
**Right:** Rapid corrosion of untreated aluminum



## Incident Monitor

Used to indicate premature high differential pressure.

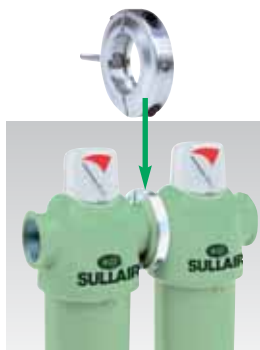

## Fixing Clamp

Joins two filters and is a wall mounting bracket in one.




## “Clean Change” Filter Element

Element changes are now easy and do not require the user to touch the contaminated element during annual element change.

## Minimal Service Clearance

Space saving design minimizes service clearance and allows installation in confined spaces.

# The World's Most Efficient Filter Element

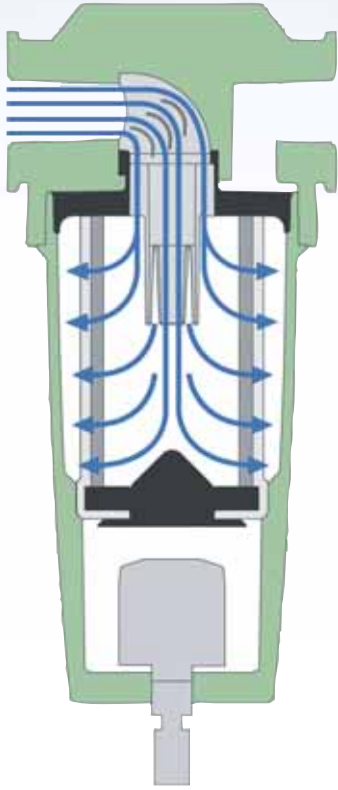

Sullair's new range of compressed air filters have been designed from the outset to meet current and forthcoming requirements for compressed air quality. Using aerospace technology, Sullair has optimized the flow path through the housing and element, significantly reducing air turbulence and pressure losses. Providing an optimal flow path is key to reducing system operating costs.



## Full Flow Inlet

Inlet conduit matches inlet diameter, reducing pressure drop and running costs.



## Even Flow Distribution

Air flow is distributed evenly throughout the filter element using a flow distributor.



## Conical Air Diffuser

Air flow distribution is further improved by elimination of turbulence.

## The Filtration Process



### Deep Bed Pleating


For particle and aerosol removal, deep bed pleating provides 450% more filter media than an ordinary element, giving a larger filtration area, lower flow velocities, increased dirt holding capacity, lower running costs and a more compact filter element. Graded density further improves filter life and overall performance.

### Oil Vapor Removal


While mechanical filtration is capable of removing extremely fine liquids and solid particles, it cannot remove gaseous contaminants such as oil vapor or odors. To efficiently remove these vapors, Sullair SCC filters employ absorption techniques.



Nanofiber filter media



Activated carbon

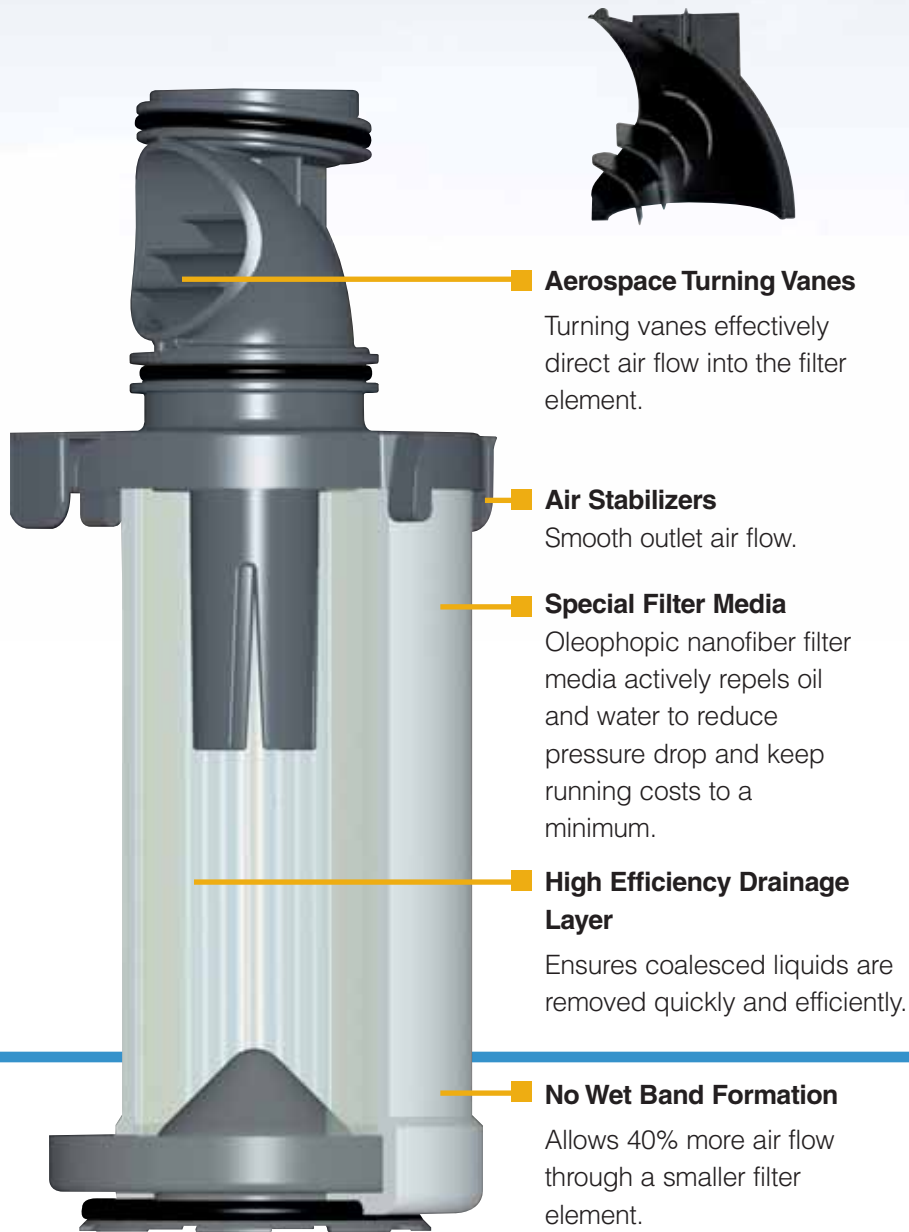

Filter media actively repels oil and water.

International Patents Pending




**Drainage Ribs**

Filter housing and element integrate to provide capillary action which greatly improves liquid drainage. Interaction between housing and element also ensures maximum coalescing performance is achieved at all times.


# Air Quality Standards ISO 8573.1 Classes

Particle size (in microns) of some common substances

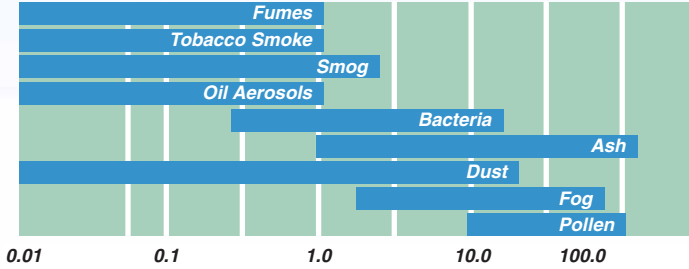

Class	Solid Particle Maximum number of particles per m <sup>3</sup>			Pressure Dew Point °F	Oil (incl. vapor) mg/m <sup>3</sup>
	0.1-0.5 micron	0.5-1 micron	1.0-5 micron		
1	100	1	0	-94	0.01
2	100,000	1,000	10	-40	0.1
3	-	10,000	500	-4	1.0
4	-	-	1,000	37	5.0
5	-	-	20,000	45	-
6	-	-	-	50	-


Sullair Air Compressor



## General Purpose Protection

Air quality to ISO 8573.1  
Class 3 (dirt), 3 (oil)  
Particles <1 micron  
Oil content <0.5 ppm


Sullair Air Compressor

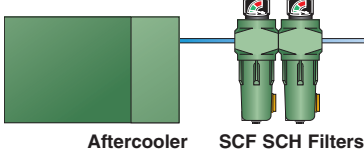

## Oil-Free Air

Air quality to ISO 8573.1  
Class 2 (dirt), 2 (oil)  
Particles <0.01 micron  
Oil content <0.01 ppm


Sullair Air Compressor

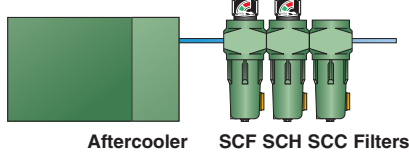

## Critical Applications

Air quality to ISO 8573.1  
Class 2 (dirt), 1 (oil)  
Particles <0.01 micron  
Oil content <0.003 ppm


Sullair Air Compressor

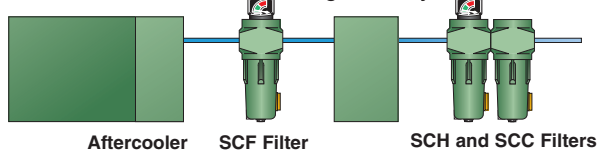

## Low Dew Point

Air quality to ISO 8573.1  
Class 2 (dirt), 4 (water), 1 (oil)


Sullair Air Compressor

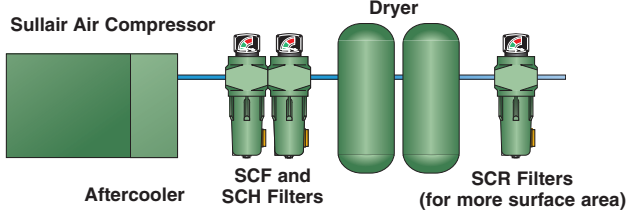

## Extremely Low Dew Point

Air quality to ISO 8573.1  
Class 2 (dirt), 2 (water), 1 (oil)  
Pressure dew point -40°F (40°C)

From Main Line

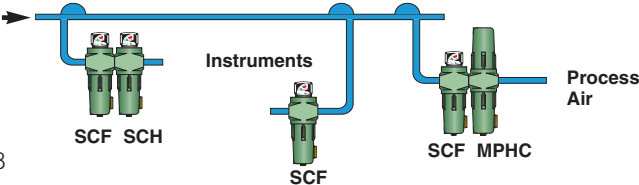

## Point-Of-Use Filtration



# Sullair Air Quality Guarantee

## Two Levels of Air Quality

Sullair recognizes that the requirements for air quality vary according to each compressed air application. For this reason, Sullair provides compressed air systems that achieve two distinct levels of air quality and a guarantee for each.

## The Sullair System.

The Sullair System matches a Sullair compressor, a Sullair dryer and Sullair filters. Sullair assures that its System will meet specific performance levels throughout its operational life. We offer a one-year test/review period, backed by a purchase refund guarantee, to verify the performance of the Sullair System.

## Select the System.

Select the air quality level to meet your plant air or process requirements. You

can be assured that the quality of air from the Sullair System you specify will remain consistent for the life of the equipment. Sullair guarantees it... and that's as good as gold.



## The Sullair Oil-Free Air Quality Guarantee.

The System consists of a Sullair compressor, Sullair dryer, and Sullair SCF and SCH or PF/PH filters. The compressed air from this system contains particulates no larger than .01 micron, including coalesced liquid water and lubricants.

Maximum remaining oil aerosol content is 0.01 parts per million by weight (ppm/w) @ 70°F, including oil vapor. The air from this Sullair System meets the most stringent ISO standard (ISO 8573.1, Class 1 for oil vapor and Class 2 for Particulate) for air quality.

## The Sullair Critical Air Quality Guarantee.

The compressed air from this Sullair System exceeds the ISO standard (ISO 8573.1, Class 1 for oil vapor and Class 2 for Particulate). The System includes a Sullair compressor, Sullair dryer, and Sullair SCF, SCH, and SCC; or PF, PH, and PC filters. The odor-free compressed air from this system contains particulates no larger than 0.01 micron, including water and oil aerosol content of 0.01 parts per million by weight (ppm/w) @ 70°F. The remaining oil vapor content is less than 0.003 ppm/w.

These Systems are not intended to remove carbon monoxide, methyl isocyanate or other noxious, corrosive or toxic gases, vapors or fumes. The system does not provide breathing air.

# Specifications: Sullair SCF, SCH, SCR, SCC and SCHR Filters





Model <small>SCF, SCH, SCR SCC, SCHR</small>	Capacity @ 100 psig	Inlet/Outlet Connection	Dimension (in.)					Weight (lbs)
			A	B	C	D	E	
<b>20</b>	21	3/8"	3.0	7.2	6.0	-	4.0	0.9
<b>40</b>	42	1/2"	3.8	9.3	7.9	-	4.0	2.2
<b>65</b>	64	3/4"	3.8	9.3	7.9	-	4.0	2.2
<b>125</b>	127	1"	5.1	10.8	9.2	-	4.0	4.9
<b>235</b>	233	1-1/2"	5.1	14.3	12.7	-	4.0	5.7
<b>340</b>	339	1-1/2"	6.7	17.0	15.1	-	4.0	10.0
<b>465</b>	466	2"	6.7	20.6	18.7	-	4.0	11.6
<b>700</b>	699	2"	6.7	20.6	18.7	-	4.0	11.6
<b>910</b>	911	3"	8.1	25.3	22.9	-	4.0	22.0
<b>1315</b>	1314	3"	8.1	32.8	30.4	-	4.0	26.4
<b>2120</b>	2119	4"	16.5	46.2	43.1	-	4.0	98.0
<b>MPHC 13</b>	13	1/4"	3.0	5.3	5.3	5.3	2.8	2.2
<b>MPHC 27</b>	27	3/8"	3.5	6.3	6.3	6.3	3.8	2.7
<b>MPHC 53</b>	53	1/2"	3.5	6.3	7.6	6.3	5.1	3.1
<b>MPHC 84</b>	84	3/4"	4.8	9.8	9.8	9.8	6.8	7.1
<b>MPHC 140</b>	140	1"	4.8	9.8	13.8	9.8	10.8	8.2
<b>MPHC 180</b>	180	1-1/4"	4.8	13.8	13.8	13.8	10.8	8.4

Note: The SCC grade filter will not remove CO/CO<sub>2</sub> or other toxic gases or fumes.  
Consult factory for additional inlet/outlet connection sizes.

	SCF	SCH	SCC	SCR	SCHR
Maximum operating pressure - with autodrain (psig)	232	232	232	232	232
Maximum operating pressure - with manual drain (psig)	290	290	290	290	290
Maximum operating temperature - with autodrain	176°F	176°F	176°F	176°F	176°F
Maximum operating temperature - with manual drain	212°F	212°F	212°F	212°F	212°F
Minimum operating temperature	35°F	35°F	35°F	35°F	35°F
Standard drain type	auto	auto	manual	manual	manual

## Pressure Correction Factor

Line Pressure psig	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor	0.38	0.53	0.65	0.76	0.85	0.93	1.00	1.07	1.13	1.19	1.25	1.31	1.36	1.41	1.46	1.51
Line Pressure barg	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Correction Factor	0.38	0.53	0.65	0.76	0.85	0.93	1.00	1.07	1.13	1.19	1.25	1.31	1.36	1.41	1.46	1.51

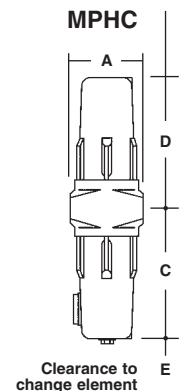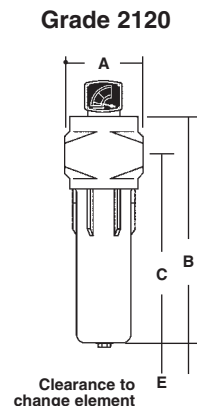

# Specifications: Sullair PF, PR, PC and PH Welded Housing Filters

Model	Capacity @100 psig	Air In/Out	Dimensions (in.)				Drain Port (in.)	Weight (lb.)
			A	B	C	D		
PF/PR-600	600	2" FLG	17-3/4	35	8-3/4	21	1/2	165
PF/PR-1200	1200	3" FLG	17-3/4	37-1/2	9-1/2	21	1/2	171
PF/PR-1600	1600	3" FLG	20	39-3/4	10-5/8	21	1/2	195
PF/PR-2100	2100	4" FLG	20	39-3/4	10-5/8	21	1/2	267
PF/PR-2750	2750	4" FLG	20	39-3/4	10-5/8	21	1/2	270
PF/PR-4200	4200	6" FLG	24	45	13-1/4	21	1/2	424
PF/PR-7000	7000	8" FLG	29-1/2	54	12-3/4	21	1	720
PF/PR-11000	11000	10" FLG	29-1/8	60-1/2	16	26	1	1040
PF/PR-16500	16500	12" FLG	39-3/8	66-5/8	18-1/2	28	1	1610
PC/PH-600	600	2" FLG	12	37-1/4	6	22	1/2	90
PC/PH-1200	1200	3" FLG	15-3/8	43-3/4	8-1/4	26	1/2	158
PC/PH-1600	1600	3" FLG	20	49-1/2	10-1/4	21	1/2	289
PC/PH-2100	2100	4" FLG	20	49-1/2	10-1/4	21	1/2	304
PC/PH-2750	2750	4" FLG	20	49-1/2	10-1/4	21	1/2	320
PC/PH-4200	4200	6" FLG	22-3/4	50-1/2	12-3/4	21	1/2	451
PC/PH-7000	7000	8" FLG	29-1/2	54	12-3/4	21	1	720
PC/PH-11000	11000	10" FLG	29-1/8	60-1/2	16	26	1	1040
PC/PH-16500	16500	12" FLG	39-3/8	66-5/8	18-1/2	28	1	1610


Dimension "D": Distance required for element removal

Note: The PC grade filter will not remove CO/CO<sub>2</sub> or other toxic gases or fumes.

	PF/PR	PH	PC
Maximum operating pressure	200 psig (14 barg)	200 psig (14 barg)	200 psig (14 barg)
Maximum operating temperature	250°F	150°F	86°F
Minimum operating temperature	35°F	35°F	35°F
Operating pressure differential fully saturated	2.0 psig	3.0 psig	4.5 psig


## Pressure Correction Factor

Line Pressure psig	25	40	50	60	75	90	100	110	125	140	150	160	175	200
Correction Factor	0.49	0.62	0.69	0.76	0.86	0.95	1.0	1.04	1.1	1.17	1.21	1.25	1.31	1.4
Line Pressure barg	1	2	3	5	7	9	11	13						
Correction Factor	.038	0.53	0.65	0.85	1.0	1.13	1.25	1.36						

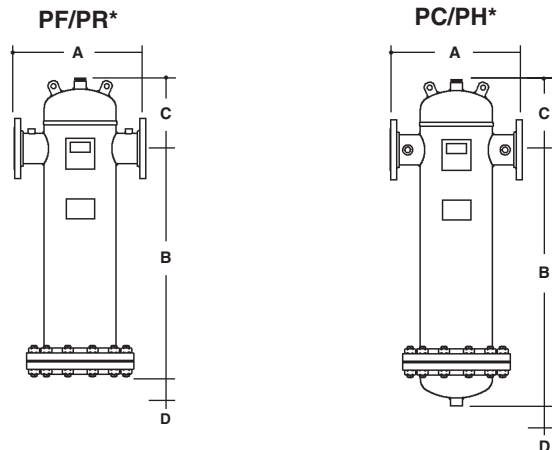

\*Consult factory for filter drawings above 4200 cfm

# Global Support. Local Solutions.

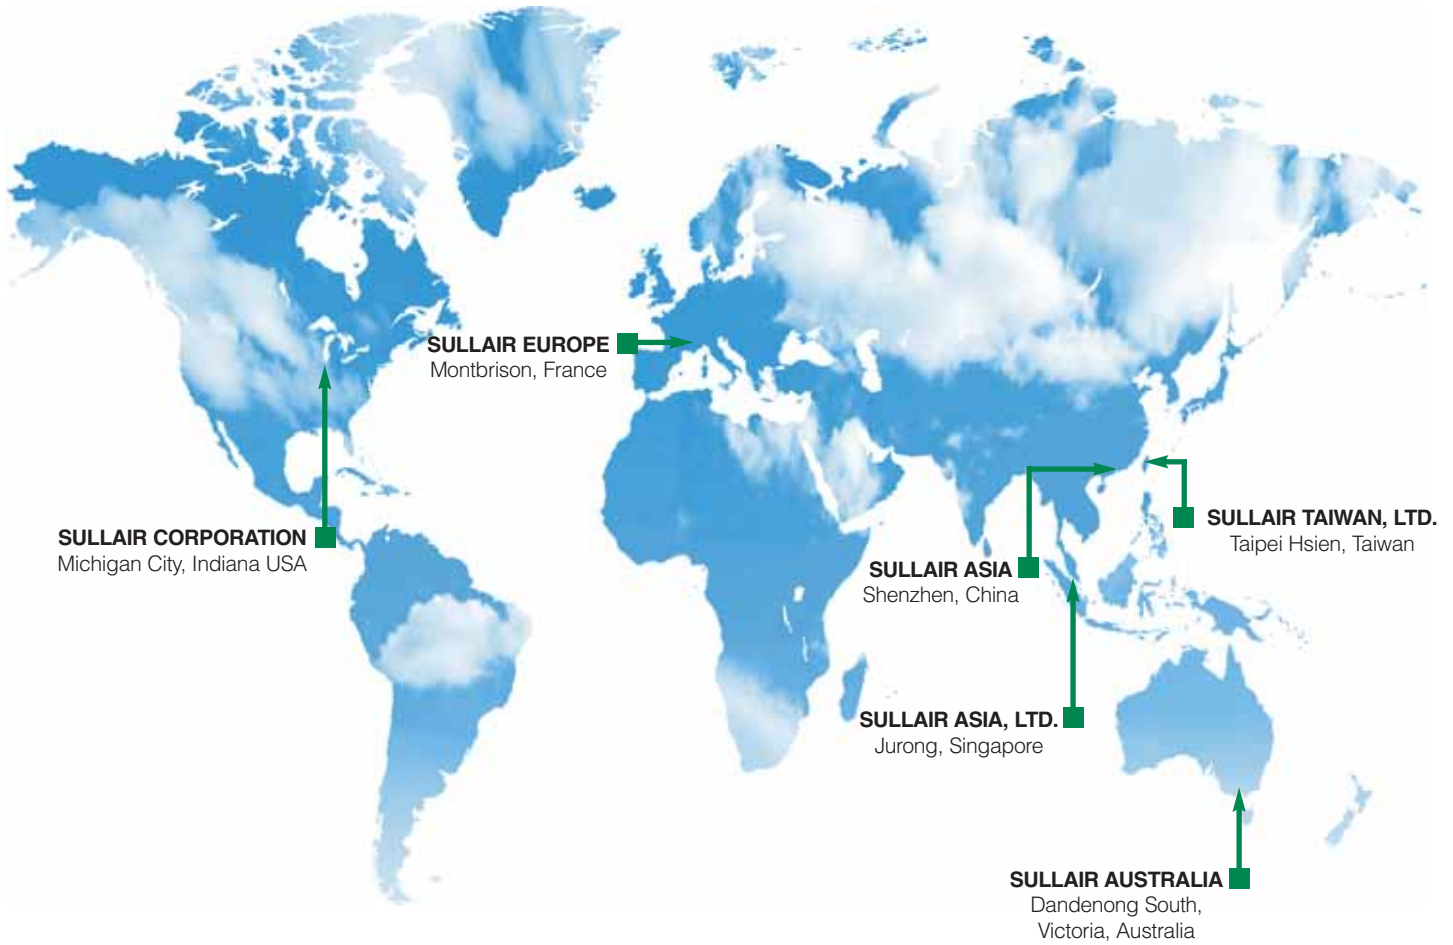

Sullair offers air system solutions to help compressed air users reduce their energy costs and improve their productivity by analyzing, managing and controlling total compressed air systems. Information on the compressed air system tailored to your specific needs can be obtained by contacting your local Sullair Distributor. To acquire local distributor contact information visit us online at [www.sullair.com](http://www.sullair.com) or call 219-879-5451.



## Sullair Corporation

3700 East Michigan Boulevard, Michigan City, IN 46360  
Telephone: 219-879-5451

[www.sullair.com](http://www.sullair.com)

Sullair Corporation, a Business Unit of Hamilton Sundstrand,  
a United Technologies Company.

© Copyright 2009 Sullair Corporation. All rights reserved.

The color green is a registered trademark of Sullair Corporation.  
Specifications subject to change without notice.

**CF01E 0911R7.5**



The paper used in printing this literature was manufactured using recycled fiber, either pre-consumer or post-consumer waste, therefore less harmful to the environment because less virgin fiber is used, thereby reducing tree harvesting, water usage, energy consumption, emission of greenhouse gases and pollution.

